

Technical data sheet

363C-024-40

Continuous control of rotary drive without spring return

Description

Actuator for adjusting air dampers of 90° angle of rotation to be used in ventilation and air conditioning systems in buildings.

- Torque Motor 40 Nm
- Nominal Voltage 24 VAC/DC
- Control Continuous DC 0(2)...10 V
- Valve size up to approx. 8 m²
- Damper coupling Clamp
 \diamond 9-18 mm / \varnothing 9-26 mm


Technical data

Nominal voltage	Nominal voltage	24 VAC (50/60Hz), 24 VDC	
	Nominal voltage range	19...29 VAC/DC	
	Power consumption Motor (Motion)	7,0 W	
	Power consumption Standby (end position)	2,0 W	
	Wire sizing	9,0 VA	
	Control		Continuous
			0(2)...10 VDC / Ri > 100 k Ω
			0(4)...20 mA / Rext. = 500 Ω
	Position feedback	0(2)...10 VDC, max 5 mA	
	Auxiliary switch	-	
	Contact load	-	
	Switching point	-	
	Connection Motor	Cable 1000 mm, 4 x 0,75 mm ² (halogen free)	
	Connection Auxiliary switch	-	
Connection Position feedback	-		
Connection GUAC	-		
Functional data	Torque Motor	>40 Nm	
	Synchronised speed	\pm 5%	
	Direction of rotation	selected by switch	
	Manual override	Gearing latch disengaged with pushbutton, self-resetting	
	Angle of rotation	0° ... max. 95°, can be limited with adjustable mechanical end stop	
		Adaption of operating range to match the mechanical angle of rotation.	
	Running time Motor	<150 s / 90°	
	Sound power level Motor	< 45 dB(A)	
	Damper coupling	Clamp	
		\diamond 9-18 mm / \varnothing 9-26 mm	

Technical data

Functional data	Position indication	mechanical with pointer
	Service life	>60'000 cycles (0° - 95° - 0°) >1'000'000 partial cycles (max. ±5°)
Safety	Protection class	III (low voltage safety current)
	Degree of protection	IP54 in any mounting position
	EMC	CE (2004/108/EG)
	LVD	CE (2006/95/EG)
	Mode of operation	Typ 1 (EN 60730-1)
	Rated impulse voltage	0,8 kV (EN 60730-1)
	Control pollution degree	3 (EN 60730-1)
	Ambient temperature Normal operation	-30 ... +50°C
	Storage temperature	-30 ... +80°C
	Ambient humidity	5...95% r.F., non- condensating (EN 60730-1)
	Maintenance	maintenance free
Dimensions/ Weight	Dimensions	193 x 96 x 60 mm
	Weight	ca. 1700 g

Operating mode / Properties

Operating mode

Through connecting the power supply to BU+BN (1+2) and a reference signal Y to BK (3) of 0(2)...10VDC, moves the actuator to its specified position. The actual damper position 0...100% is a feedback signal U for example to share the signal with other actuators.

The actuator is overload-proof, requires no limit switches and automatically stops when the end stop is reached.

Direct mounting

Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.

Manual override


Manual override is possible with the self-resetting pushbutton (the gearing latch remains disengaged as long as the pushbutton is pressed)

Mode- switch


DIP-Switch under the case cover

Adaption drive

- Adaption on angle of rotation < 90°
- Actuator power-off
- Setting the mechanical end stops
- Actuator power-on
- Adaption to enable
- Actuator adaption on angular range
- Adaption to disable
- “Y” refers to the measured angular range

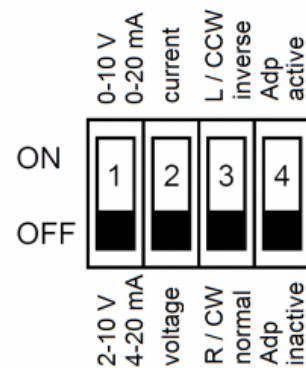

Connection / Safety remarks


Safety remarks

- Connect via safety isolation transformer
- The actuator is not allowed to be used outside the specified field of application, especially in airplanes.
- In may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross- section, design, installation site), and the air flow conditions must be observed.
- The actuator is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Technical drawing

